

The double acting door you can rely on ...

Your Flexi Doors are engineered to withstand the toughest punishment so you will benefit in savings on costly down time and repairs.



flexidoor

Flexible PVC Swing Door



PEDESTRIAN AND LIGHT VEHICULAR ACCESS DOORS

The Flexi Door is your perfect answer for all your pedestrian and light vehicle doorways, manufactured to your exacting requirements from unique cost efficient, modular componentry.

EASY DOOR SELECTION

Flexi Doors are suitable for openings up to 3000 mm high x 2500 mm wide, with the inclusion of reinforcing gussets.

EFFECTIVE ENVIRONMENT BARRIER

The standard EPDM seals to the back edge of the door frame and 100 mm overlap of PVC panels makes Flexi Door one of the most efficient door available against draughts, wind, noise, heat, cold, dust, fumes and insects.

Using special grade PVC, Flexi Door can be used as ante doors in freezer application.

EASY CARE DESIGN

All parts can be quickly and economically replaced using standard sized stock components and should the PVC be damaged it is easily repaired. Normal care consists of occasional washing with suitable detergent.

spanker
INTERNATIONAL

We have a solution to suit every doorway problem!


flexidoor

Flexible PVC Swing Door

FEATURES OF YOUR FLEXIDOOR

- See through panels means safe two way traffic flow.
- Hands free operation, door opens with a gentle push and closes automatically behind you.
- Silent operation by Flexible PVC panels absorbing any impact during opening and closing.
- Concealed spring controls, fully adjustable to suit your requirement.
- Flexi Doors are manufactured to clinical requirements as standard.
- All PVC used is non toxic and contains no heavy metals, such as cadmium, lead or barium.

FOR OPENINGS LARGER THAN STANDARD

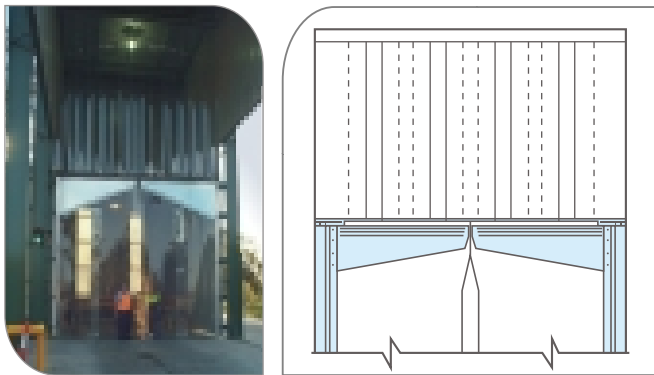

Door openings with a height in excess of 3000 mm, strip curtain can be fitted above the doors.

Important Design Standards for all Flexible Doors

To enhance the life of any impact operated flexible doors it is strongly recommended that, where mechanical or hand operated traffic is used, door should be approximately 10% higher and 30% wider than the size of equipment passing through the opening.

Solving your door problems



Doors are manufactured using our proven modular componentry systems and advanced production techniques. We can design, supply and install all of your door requirements quickly and efficiently, to solve your doorway problems, simply and economically.

Information contained herein is to the best of our knowledge and belief, accurate and reliable. Use of any of the materials featured in this catalog is the sole responsibility of the end-user of our product.

Spanker International has a continuous program of Product Development and reserves the right to change specifications at any time without notice.

Your local distributor:

Design Benefits of your flexidoors

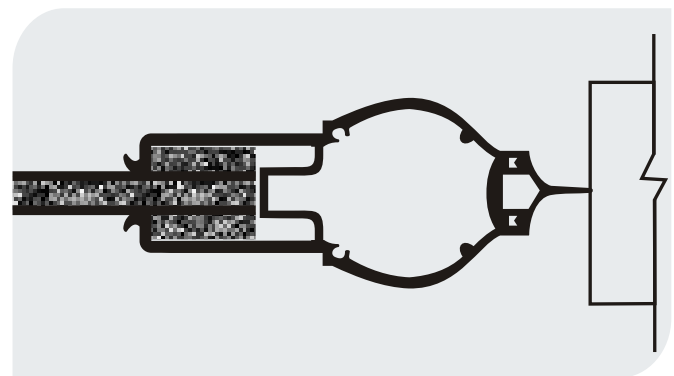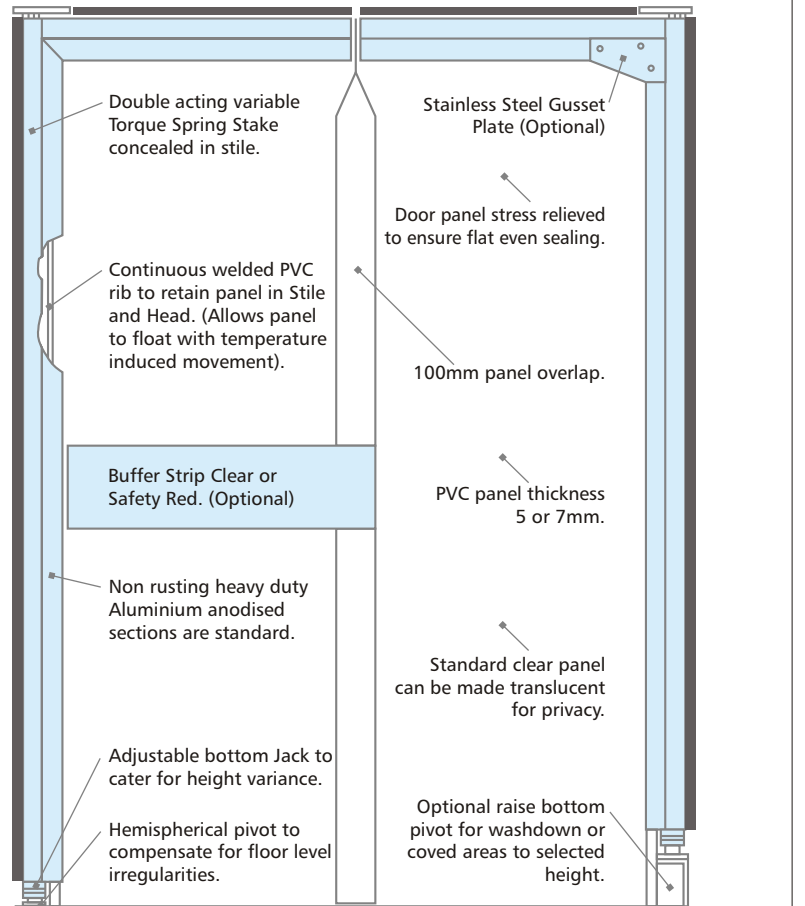

EFFECTIVE DUST SEALING

To provide more efficient sealing between the door frame and jambs, Flexi Door incorporate a EPDM seal, on both the stile and head profiles.

spanker
INTERNATIONAL

27, Gopi Estate, Bh. Spice World, Changodar,
Ahmedabad - 382213 INDIA. Tele : +91-2717-251581/325998
Fax : +91-2717-251580 Email : sales@spanker.in

www.spanker.in